



C50 Compressors

Low flow series




C50-2/3/4



C50 Compressors

ASPRO C50 Compressor Line for CNG, satisfies the needs of operation in low flow range. Its compact design, with reduced dimensions, allows easy and economical transport, handling, installation and maintenance. The C-50 equipment is the ideal solution to supply private fleets.

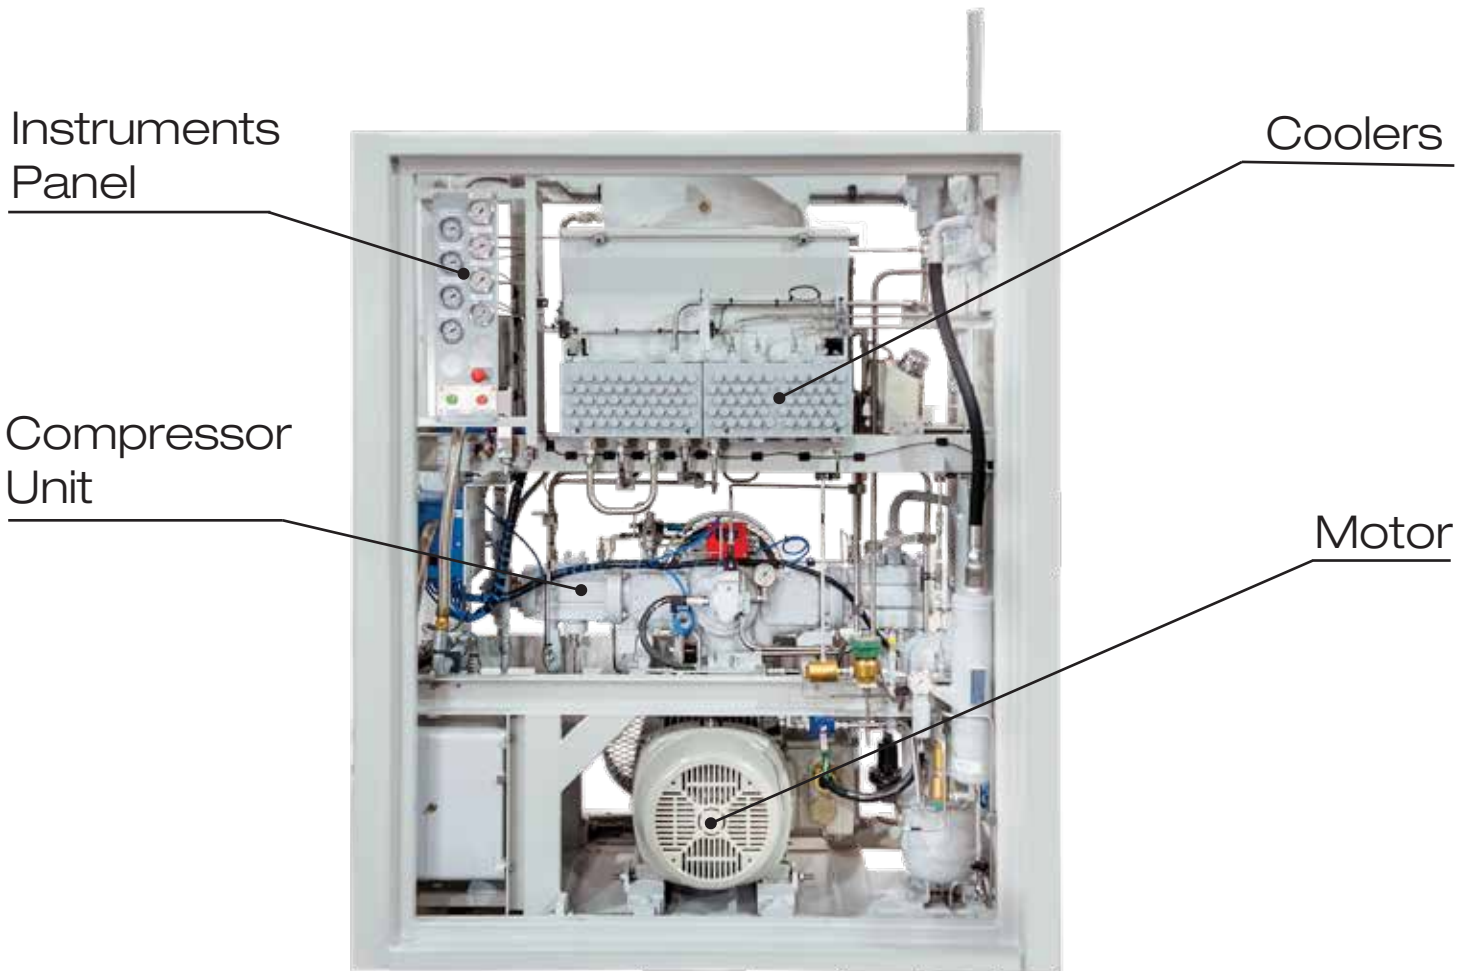


Applications

- Private fleets
- Forklifts in industries
- GNG Stations with low volume of sales
- Biogas compression

Technical characteristics

- Suction range 0.9 to 45 Bar.
- Max flow: 400 Nm³ / h.
- Stroke: 50 mm
- 2, 3 or 4 stage configuration
- Max Power: 45Kw @ 1800 rpm (50Hz / 60Hz)
- Control Panel on-board
- Electric motor (APE)
- Belt transmission
- Air cooling / ventilation
- Lubrication system

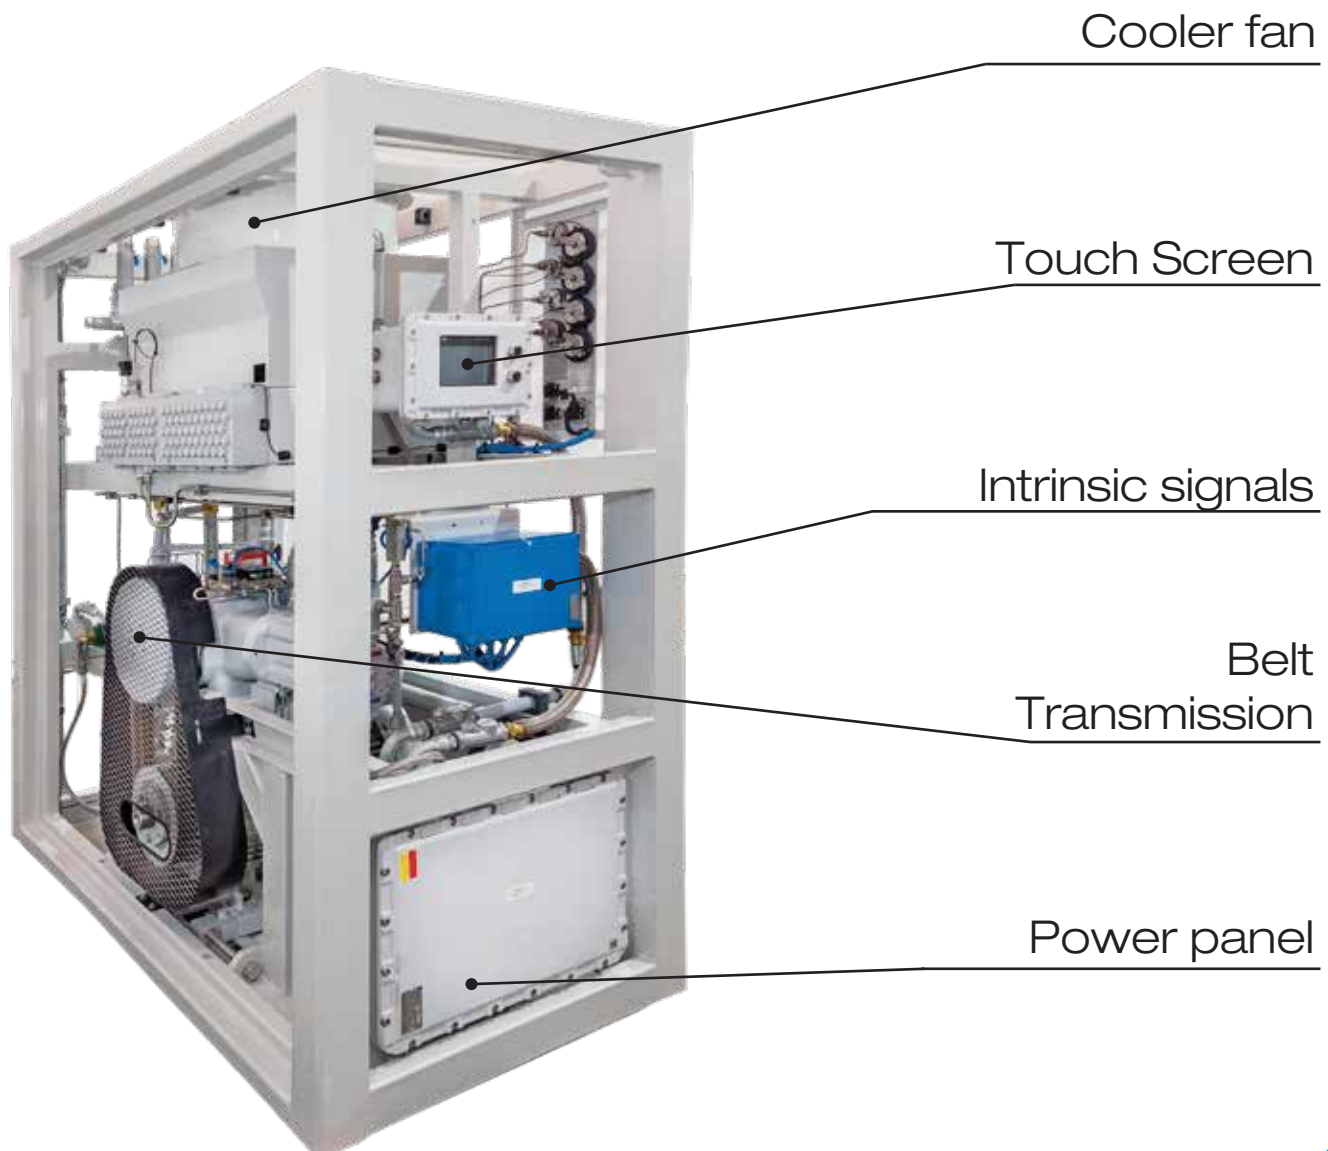

Design features

- Quick and easy connection
- Convenient operation
- Small dimensions
- Low maintenance cost
- Low cost of handling and installation
- Low energy consumption
- Reliability and safety operation

Safety valves

Oil deposit

Belt transmission

Blowcase tank





C50 Compressors

Measures

- Width: 1.000 cm
- Length: 1.850 cm
- Height: 2.180 cm
- Approximate weight: 3.654 kg



Optional

- Enclosure
- Remote Control Panel
- BD module (Daughter stations - download trailers)



C50 Compressors



Aspro industrial plant



Delta Compresión S.R.L
Benito Lynch 500
C.P. 1648 | Los Troncos del Talar
Buenos Aires, Argentina
Tel: +54 (11) 7078-8100
www.aspro.com

www.aspro.com